KepGwire — Double Distal Guidewire
TECHNICAL SPECIFICATIONS

GUIDEWIRE

Distal configuration	**Double distal**
Diameters	**0.018", 0.021", 0.025", 0.028", 0.032", 0.035", 0.038", 0.040", 0.045", 0.050"**
Lengths	**40, 45, 50, 60, 70, 100, 150, 180, 260, 450 cm**
Tip	**Straight or J**
Surface	**Uncoated or PTFE coated**

SUPPLY

Sterility	**Supplied sterile**
Use	**Single use only**
Sterilisation	**Ethylene oxide**

KepGwire — Double Distal Guidewire
ORDERING INFORMATION

Ordering information with all ordering codes is given on the following page.

KMD INDIA
KEPLER MEDICAL DEVICES PVT. LTD.
ADVANCING SCIENCE FOR LIFE

ADVANCING SCIENCE FOR LIFE

Kepler Headquarters
KEPLER TOWER, One Square, First & Second Floor, Rail Vihar Colony, Sector L, Ashiyana, opposite the Chancellor's Club, Lucknow, Uttar Pradesh 226012
Phone: 0522-3142852

Kepler Sales Office
KEPLER TOWER, One Square, Ground Floor, Rail Vihar Colony, Sector L, Ashiyana, opposite the Chancellor's Club, Lucknow, Uttar Pradesh 226012
Phone: 0522-3167000

Manufacturing Plant
Plot No. 400 to 405, Ward No. 29, Satya Nagar, Raebareli, Uttar Pradesh 229001
Phone: 0535-3568571

Mobile
+91 9305855463 · +91 8840843868

Email
keplermedicaldevices@gmail.com

Website
www.keplermedicaldevices.com

Kepler Medical Devices Private Limited
Supplied sterile, for single use only. Read the Instructions for Use supplied with the device before use for indications, contraindications, warnings and precautions. Specifications are subject to change without notice.


KMD/CAT/KEPGWIREDO/R00 · November 2026

KMD INDIA
KEPLER MEDICAL DEVICES PVT. LTD.
ADVANCING SCIENCE FOR LIFE

GUIDEWIRES

KepGwire — Double Distal Guidewire

Double Distal Guidewire

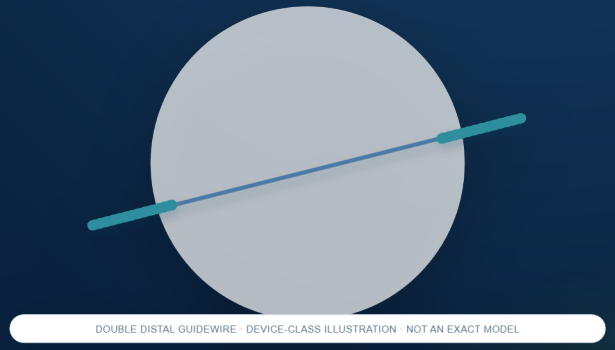

DOUBLE DISTAL GUIDEWIRE · DEVICE-CLASS ILLUSTRATION · NOT AN EXACT MODEL

Navigate with Confidence.

GUIDEWIRES · ANGIOGRAPHY & ACCESS GUIDEWIRES

KepGwire — Double Distal Guidewire

KepGwire Double Distal has a flexible distal segment at both ends of the wire. Either end can be introduced first, so one wire gives two tip options.

The dual distal construction supports stability and trackability during catheter placement. It is available in ten diameters and ten lengths, uncoated or PTFE coated, with straight or J tips.

Key features

Two flexible ends
A usable distal tip at each end of the wire.

Straight or J tip
Tip options to suit the anatomy.

Uncoated or PTFE coated
Choose the surface for the procedure.

Stable support
Supports catheter advancement and exchange.

Kink resistant
Keeps its shape during use.

400 configurations
Ten diameters and ten lengths.

Design & technology

Wire design

Both ends of the wire taper to a flexible distal segment.

- Double distal construction
- Fixed core

Tip options

Straight and J tips are available.

- Straight tip
- J tip

Surface

PTFE coating lowers friction inside the catheter.

- Uncoated
- PTFE coated

Size range

A full matrix of diameters and lengths is available.


- Diameters 0.018"–0.050"
- Lengths 40–450 cm

Product highlights

- Distal configuration: Double distal
- Diameters: 0.018", 0.021", 0.025", 0.028", 0.032", 0.035", 0.038", 0.040", 0.045", 0.050"
- Lengths: 40, 45, 50, 60, 70, 100, 150, 180, 260, 450 cm
- Tip: Straight or J
- Surface: Uncoated or PTFE coated

Intended use

KepGwire Double Distal is intended to facilitate the placement of catheters during diagnostic and interventional procedures.

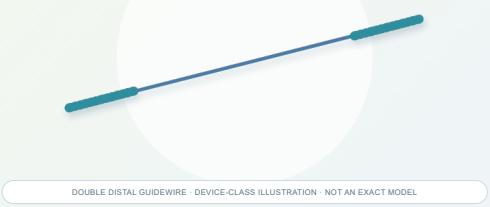

Double Distal Guidewire

KepGwire — Double Distal Guidewire
ORDERING INFORMATION (CONTINUED)

Uncoated · Straight tip

Diameter \ Length (cm)	40	45	50	60	70	100	150	180	260	450
0.018"	NT/GW/DD/1840ST/UC	NT/GW/DD/1845ST/UC	NT/GW/DD/1850ST/UC	NT/GW/DD/1860ST/UC	NT/GW/DD/1870ST/UC	NT/GW/DD/18100ST/UC	NT/GW/DD/18150ST/UC	NT/GW/DD/18180ST/UC	NT/GW/DD/18260ST/UC	NT/GW/DD/18450ST/UC
0.021"	NT/GW/DD/2140ST/UC	NT/GW/DD/2145ST/UC	NT/GW/DD/2150ST/UC	NT/GW/DD/2160ST/UC	NT/GW/DD/2170ST/UC	NT/GW/DD/21100ST/UC	NT/GW/DD/21150ST/UC	NT/GW/DD/21180ST/UC	NT/GW/DD/21260ST/UC	NT/GW/DD/21450ST/UC
0.025"	NT/GW/DD/2540ST/UC	NT/GW/DD/2545ST/UC	NT/GW/DD/2550ST/UC	NT/GW/DD/2560ST/UC	NT/GW/DD/2570ST/UC	NT/GW/DD/25100ST/UC	NT/GW/DD/25150ST/UC	NT/GW/DD/25180ST/UC	NT/GW/DD/25260ST/UC	NT/GW/DD/25450ST/UC
0.028"	NT/GW/DD/2840ST/UC	NT/GW/DD/2845ST/UC	NT/GW/DD/2850ST/UC	NT/GW/DD/2860ST/UC	NT/GW/DD/2870ST/UC	NT/GW/DD/28100ST/UC	NT/GW/DD/28150ST/UC	NT/GW/DD/28180ST/UC	NT/GW/DD/28260ST/UC	NT/GW/DD/28450ST/UC
0.032"	NT/GW/DD/3240ST/UC	NT/GW/DD/3245ST/UC	NT/GW/DD/3250ST/UC	NT/GW/DD/3260ST/UC	NT/GW/DD/3270ST/UC	NT/GW/DD/32100ST/UC	NT/GW/DD/32150ST/UC	NT/GW/DD/32180ST/UC	NT/GW/DD/32260ST/UC	NT/GW/DD/32450ST/UC
0.035"	NT/GW/DD/3540ST/UC	NT/GW/DD/3545ST/UC	NT/GW/DD/3550ST/UC	NT/GW/DD/3560ST/UC	NT/GW/DD/3570ST/UC	NT/GW/DD/35100ST/UC	NT/GW/DD/35150ST/UC	NT/GW/DD/35180ST/UC	NT/GW/DD/35260ST/UC	NT/GW/DD/35450ST/UC
0.038"	NT/GW/DD/3840ST/UC	NT/GW/DD/3845ST/UC	NT/GW/DD/3850ST/UC	NT/GW/DD/3860ST/UC	NT/GW/DD/3870ST/UC	NT/GW/DD/38100ST/UC	NT/GW/DD/38150ST/UC	NT/GW/DD/38180ST/UC	NT/GW/DD/38260ST/UC	NT/GW/DD/38450ST/UC
0.040"	NT/GW/DD/4040ST/UC	NT/GW/DD/4045ST/UC	NT/GW/DD/4050ST/UC	NT/GW/DD/4060ST/UC	NT/GW/DD/4070ST/UC	NT/GW/DD/40100ST/UC	NT/GW/DD/40150ST/UC	NT/GW/DD/40180ST/UC	NT/GW/DD/40260ST/UC	NT/GW/DD/40450ST/UC
0.045"	NT/GW/DD/4540ST/UC	NT/GW/DD/4545ST/UC	NT/GW/DD/4550ST/UC	NT/GW/DD/4560ST/UC	NT/GW/DD/4570ST/UC	NT/GW/DD/45100ST/UC	NT/GW/DD/45150ST/UC	NT/GW/DD/45180ST/UC	NT/GW/DD/45260ST/UC	NT/GW/DD/45450ST/UC
0.050"	NT/GW/DD/5040ST/UC	NT/GW/DD/5045ST/UC	NT/GW/DD/5050ST/UC	NT/GW/DD/5060ST/UC	NT/GW/DD/5070ST/UC	NT/GW/DD/50100ST/UC	NT/GW/DD/50150ST/UC	NT/GW/DD/50180ST/UC	NT/GW/DD/50260ST/UC	NT/GW/DD/50450ST/UC

Uncoated · J tip

Diameter \ Length (cm)	40	45	50	60	70	100	150	180	260	450
0.018"	NT/GW/DD/1840J/UC	NT/GW/DD/1845J/UC	NT/GW/DD/1850J/UC	NT/GW/DD/1860J/UC	NT/GW/DD/1870J/UC	NT/GW/DD/18100J/UC	NT/GW/DD/18150J/UC	NT/GW/DD/18180J/UC	NT/GW/DD/18260J/UC	NT/GW/DD/18450J/UC
0.021"	NT/GW/DD/2140J/UC	NT/GW/DD/2145J/UC	NT/GW/DD/2150J/UC	NT/GW/DD/2160J/UC	NT/GW/DD/2170J/UC	NT/GW/DD/21100J/UC	NT/GW/DD/21150J/UC	NT/GW/DD/21180J/UC	NT/GW/DD/21260J/UC	NT/GW/DD/21450J/UC
0.025"	NT/GW/DD/2540J/UC	NT/GW/DD/2545J/UC	NT/GW/DD/2550J/UC	NT/GW/DD/2560J/UC	NT/GW/DD/2570J/UC	NT/GW/DD/25100J/UC	NT/GW/DD/25150J/UC	NT/GW/DD/25180J/UC	NT/GW/DD/25260J/UC	NT/GW/DD/25450J/UC
0.028"	NT/GW/DD/2840J/UC	NT/GW/DD/2845J/UC	NT/GW/DD/2850J/UC	NT/GW/DD/2860J/UC	NT/GW/DD/2870J/UC	NT/GW/DD/28100J/UC	NT/GW/DD/28150J/UC	NT/GW/DD/28180J/UC	NT/GW/DD/28260J/UC	NT/GW/DD/28450J/UC
0.032"	NT/GW/DD/3240J/UC	NT/GW/DD/3245J/UC	NT/GW/DD/3250J/UC	NT/GW/DD/3260J/UC	NT/GW/DD/3270J/UC	NT/GW/DD/32100J/UC	NT/GW/DD/32150J/UC	NT/GW/DD/32180J/UC	NT/GW/DD/32260J/UC	NT/GW/DD/32450J/UC
0.035"	NT/GW/DD/3540J/UC	NT/GW/DD/3545J/UC	NT/GW/DD/3550J/UC	NT/GW/DD/3560J/UC	NT/GW/DD/3570J/UC	NT/GW/DD/35100J/UC	NT/GW/DD/35150J/UC	NT/GW/DD/35180J/UC	NT/GW/DD/35260J/UC	NT/GW/DD/35450J/UC
0.038"	NT/GW/DD/3840J/UC	NT/GW/DD/3845J/UC	NT/GW/DD/3850J/UC	NT/GW/DD/3860J/UC	NT/GW/DD/3870J/UC	NT/GW/DD/38100J/UC	NT/GW/DD/38150J/UC	NT/GW/DD/38180J/UC	NT/GW/DD/38260J/UC	NT/GW/DD/38450J/UC
0.040"	NT/GW/DD/4040J/UC	NT/GW/DD/4045J/UC	NT/GW/DD/4050J/UC	NT/GW/DD/4060J/UC	NT/GW/DD/4070J/UC	NT/GW/DD/40100J/UC	NT/GW/DD/40150J/UC	NT/GW/DD/40180J/UC	NT/GW/DD/40260J/UC	NT/GW/DD/40450J/UC
0.045"	NT/GW/DD/4540J/UC	NT/GW/DD/4545J/UC	NT/GW/DD/4550J/UC	NT/GW/DD/4560J/UC	NT/GW/DD/4570J/UC	NT/GW/DD/45100J/UC	NT/GW/DD/45150J/UC	NT/GW/DD/45180J/UC	NT/GW/DD/45260J/UC	NT/GW/DD/45450J/UC
0.050"	NT/GW/DD/5040J/UC	NT/GW/DD/5045J/UC	NT/GW/DD/5050J/UC	NT/GW/DD/5060J/UC	NT/GW/DD/5070J/UC	NT/GW/DD/50100J/UC	NT/GW/DD/50150J/UC	NT/GW/DD/50180J/UC	NT/GW/DD/50260J/UC	NT/GW/DD/50450J/UC

PTFE · Straight tip

Diameter \ Length (cm)	40	45	50	60	70	100	150	180	260	450
0.018"	NT/GW/DD/1840ST	NT/GW/DD/1845ST	NT/GW/DD/1850ST	NT/GW/DD/1860ST	NT/GW/DD/1870ST	NT/GW/DD/18100ST	NT/GW/DD/18150ST	NT/GW/DD/18180ST	NT/GW/DD/18260ST	NT/GW/DD/18450ST
0.021"	NT/GW/DD/2140ST	NT/GW/DD/2145ST	NT/GW/DD/2150ST	NT/GW/DD/2160ST	NT/GW/DD/2170ST	NT/GW/DD/21100ST	NT/GW/DD/21150ST	NT/GW/DD/21180ST	NT/GW/DD/21260ST	NT/GW/DD/21450ST
0.025"	NT/GW/DD/2540ST	NT/GW/DD/2545ST	NT/GW/DD/2550ST	NT/GW/DD/2560ST	NT/GW/DD/2570ST	NT/GW/DD/25100ST	NT/GW/DD/25150ST	NT/GW/DD/25180ST	NT/GW/DD/25260ST	NT/GW/DD/25450ST
0.028"	NT/GW/DD/2840ST	NT/GW/DD/2845ST	NT/GW/DD/2850ST	NT/GW/DD/2860ST	NT/GW/DD/2870ST	NT/GW/DD/28100ST	NT/GW/DD/28150ST	NT/GW/DD/28180ST	NT/GW/DD/28260ST	NT/GW/DD/28450ST
0.032"	NT/GW/DD/3240ST	NT/GW/DD/3245ST	NT/GW/DD/3250ST	NT/GW/DD/3260ST	NT/GW/DD/3270ST	NT/GW/DD/32100ST	NT/GW/DD/32150ST	NT/GW/DD/32180ST	NT/GW/DD/32260ST	NT/GW/DD/32450ST
0.035"	NT/GW/DD/3540ST	NT/GW/DD/3545ST	NT/GW/DD/3550ST	NT/GW/DD/3560ST	NT/GW/DD/3570ST	NT/GW/DD/35100ST	NT/GW/DD/35150ST	NT/GW/DD/35180ST	NT/GW/DD/35260ST	NT/GW/DD/35450ST
0.038"	NT/GW/DD/3840ST	NT/GW/DD/3845ST	NT/GW/DD/3850ST	NT/GW/DD/3860ST	NT/GW/DD/3870ST	NT/GW/DD/38100ST	NT/GW/DD/38150ST	NT/GW/DD/38180ST	NT/GW/DD/38260ST	NT/GW/DD/38450ST
0.040"	NT/GW/DD/4040ST	NT/GW/DD/4045ST	NT/GW/DD/4050ST	NT/GW/DD/4060ST	NT/GW/DD/4070ST	NT/GW/DD/40100ST	NT/GW/DD/40150ST	NT/GW/DD/40180ST	NT/GW/DD/40260ST	NT/GW/DD/40450ST
0.045"	NT/GW/DD/4540ST	NT/GW/DD/4545ST	NT/GW/DD/4550ST	NT/GW/DD/4560ST	NT/GW/DD/4570ST	NT/GW/DD/45100ST	NT/GW/DD/45150ST	NT/GW/DD/45180ST	NT/GW/DD/45260ST	NT/GW/DD/45450ST
0.050"	NT/GW/DD/5040ST	NT/GW/DD/5045ST	NT/GW/DD/5050ST	NT/GW/DD/5060ST	NT/GW/DD/5070ST	NT/GW/DD/50100ST	NT/GW/DD/50150ST	NT/GW/DD/50180ST	NT/GW/DD/50260ST	NT/GW/DD/50450ST

PTFE · J tip

Diameter \ Length (cm)	40	45	50	60	70	100	150	180	260	450
0.018"	NT/GW/DD/1840J	NT/GW/DD/1845J	NT/GW/DD/1850J	NT/GW/DD/1860J	NT/GW/DD/1870J	NT/GW/DD/18100J	NT/GW/DD/18150J	NT/GW/DD/18180J	NT/GW/DD/18260J	NT/GW/DD/18450J
0.021"	NT/GW/DD/2140J	NT/GW/DD/2145J	NT/GW/DD/2150J	NT/GW/DD/2160J	NT/GW/DD/2170J	NT/GW/DD/21100J	NT/GW/DD/21150J	NT/GW/DD/21180J	NT/GW/DD/21260J	NT/GW/DD/21450J
0.025"	NT/GW/DD/2540J	NT/GW/DD/2545J	NT/GW/DD/2550J	NT/GW/DD/2560J	NT/GW/DD/2570J	NT/GW/DD/25100J	NT/GW/DD/25150J	NT/GW/DD/25180J	NT/GW/DD/25260J	NT/GW/DD/25450J
0.028"	NT/GW/DD/2840J	NT/GW/DD/2845J	NT/GW/DD/2850J	NT/GW/DD/2860J	NT/GW/DD/2870J	NT/GW/DD/28100J	NT/GW/DD/28150J	NT/GW/DD/28180J	NT/GW/DD/28260J	NT/GW/DD/28450J
0.032"	NT/GW/DD/3240J	NT/GW/DD/3245J	NT/GW/DD/3250J	NT/GW/DD/3260J	NT/GW/DD/3270J	NT/GW/DD/32100J	NT/GW/DD/32150J	NT/GW/DD/32180J	NT/GW/DD/32260J	NT/GW/DD/32450J
0.035"	NT/GW/DD/3540J	NT/GW/DD/3545J	NT/GW/DD/3550J	NT/GW/DD/3560J	NT/GW/DD/3570J	NT/GW/DD/35100J	NT/GW/DD/35150J	NT/GW/DD/35180J	NT/GW/DD/35260J	NT/GW/DD/35450J
0.038"	NT/GW/DD/3840J	NT/GW/DD/3845J	NT/GW/DD/3850J	NT/GW/DD/3860J	NT/GW/DD/3870J	NT/GW/DD/38100J	NT/GW/DD/38150J	NT/GW/DD/38180J	NT/GW/DD/38260J	NT/GW/DD/38450J
0.040"	NT/GW/DD/4040J	NT/GW/DD/4045J	NT/GW/DD/4050J	NT/GW/DD/4060J	NT/GW/DD/4070J	NT/GW/DD/40100J	NT/GW/DD/40150J	NT/GW/DD/40180J	NT/GW/DD/40260J	NT/GW/DD/40450J
0.045"	NT/GW/DD/4540J	NT/GW/DD/4545J	NT/GW/DD/4550J	NT/GW/DD/4560J	NT/GW/DD/4570J	NT/GW/DD/45100J	NT/GW/DD/45150J	NT/GW/DD/45180J	NT/GW/DD/45260J	NT/GW/DD/45450J
0.050"	NT/GW/DD/5040J	NT/GW/DD/5045J	NT/GW/DD/5050J	NT/GW/DD/5060J	NT/GW/DD/5070J	NT/GW/DD/50100J	NT/GW/DD/50150J	NT/GW/DD/50180J	NT/GW/DD/50260J	NT/GW/DD/50450J

400 configurations · Quote the ordering code when placing an order.